



HAL
open science

Movement Behavior Analysis of Workers using Spatio-temporal Trajectories for Safety Management

Muhammad Arslan, Christophe Cruz, Dominique Ginhac

► **To cite this version:**

Muhammad Arslan, Christophe Cruz, Dominique Ginhac. Movement Behavior Analysis of Workers using Spatio-temporal Trajectories for Safety Management. MARAMI 2019 Modèles & Analyse des Réseaux : Approches Mathématiques & Informatiques, Nov 2019, DIJON, France. hal-02440417

HAL Id: hal-02440417

<https://u-bourgogne.hal.science/hal-02440417v1>

Submitted on 14 Jan 2021

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Movement Behavior Analysis of Workers using Spatio-temporal Trajectories for Safety Management

Muhammad Arslan¹[0000-0003-3682-7002], Christophe Cruz¹[0000-0002-5611-9479]


and Dominique Ginhac¹[0000-0002-5911-2010]

¹Univ. Bourgogne Franche-Comté (UBFC), 9 rue Alain Savary, Dijon Cedex 21078, France
muhammad.arslan@u-bourgogne.fr, christophe.cruz@ubfc.fr,
dominique.ginhac@ubfc.fr



Extended Abstract. Occupants' movements and presence are fundamental and the pre-requisite for any type of occupant behaviors' understanding for safety management in buildings which tells whether a building location is occupied, the number of occupants or an occupant with a specific profile in a certain location (Arslan et al. 2019). Numerous studies have been conducted over the past few decades to model occupant behaviors stochastically for an improved understanding of their activities for different safety management applications (Hong et al. 2015; Yan et al. 2015). Despite many research efforts to model dynamic behaviors of building occupants, there is still a gap exists in understanding their behaviors in the context of dynamic building environments (Arslan et al. 2019). The contextual data linked to locations in dynamic environments evolve often over time in terms of position, size, properties and relationships with the environment (Cruz 2017). This changing building environment effects the occupants' movements and presence inside the facility which ultimately degrades the process of inferring their accurate activities based on the location context. Henceforth, the evolving building information is required to be mapped with occupant movements for an improved understanding of their changing behaviors for safety management applications. To fill this research gap, a framework named 'Occupant Behaviors in Dynamic Environments' (OBiDE) is designed for providing a 'blueprint map' to integrate existing DNAS (Drivers, Needs, Systems, Actions) model (i.e. a scheme to model occupant behaviors) with our STriDE (Semantic Trajectories in Dynamic Environments) data model to include the dynamicity of building locations for an improved understanding of occupant behaviors for safety management. The proposed framework extends the usability of DNAS (Hong et al. 2015) by providing a centralized knowledge base that holds the movements of occupants with relevant historicized contextual information of the

29 building environment to study occupant behaviors for different facility management applications.
30 The proposed framework (see Fig. 1) requires sensory data to include context to occupant move-
31 ments and presence for performing behavioral analysis. The acquisition of relevant sensor data is
32 based on the application requirement. For instance, the safety manager of a building requires to
33 monitor the movements of the occupants in a building. In this case, using our OBiDE framework,
34 ‘driver’ is monitoring movements of occupants, ‘need’ is achieving safety management in a build-
35 ing by identifying unsafe movements, ‘action’ is tracking movements of occupants using their spa-
36 tio-temporal trajectories, ‘system’ corresponds to Bluetooth Low Energy (BLE) beacons for sensor
37 data acquisition deployed in a building and ‘states’ are 1) static (no movement), 2) normal move-
38 ment ($0 < \text{steps} \leq 84$ and $\pi/2 \leq \text{angle} < \pi$) and 3) risky/unsafe ($\text{steps} > 84$ and $\text{angle} \geq \pi$). Existing
39 literature (Arslan et al. 2019) suggests that the movement behavior of an occupant is defined using
40 step length and turning angle. The average walking speed of a person range from 1.0 to 1.6 meters
41 per second (m/s). Keeping an indoor environment into account, a value of 1.4 m/s as a safe walking
42 speed limit that will give us 84 steps per minute i.e. the sum of step lengths for a minute. For un-
43 derstanding movement-based behaviors for a safety management application, around 200 BLE bea-
44 cons are installed on different building locations. Approximately 13,223 location coordinates are
45 collected across different locations using deployed beacons. After sensor data acquisition, the ac-
46 quired location data is transformed into trajectories after preprocessing (i.e. filtering). More infor-
47 mation on trajectories and their preprocessing can be found in (Zheng 2015). After preprocessing
48 the trajectories, the STriDE model (Cruz 2017) is used to add contextual information of a building
49 environment in collected trajectories for mapping actual building locations with each trajectory
50 point. For tracking the evolution of building objects (occupants, trajectories and locations), the
51 STriDE model uses the concept of timeslices (TSs). For modeling the behaviors to recognize and
52 categorize the movements into different states, many types of non-probabilistic and probabilistic
53 approaches exist in the literature such as Bayesian dynamic models and clustering techniques, state-
54 based models such as simple Markov chains and HMMs, patterns matching algorithms and deep
55 learning-based techniques (Arslan et al. 2019). Though, HMMs-based method is selected for our
56 application as statistical HMMs describe occupant movements as a series of Markovian stochastic
57 processes where the probability distribution of a future state (i.e. safe or unsafe behavior or a next
58 location) of a stochastic (i.e. a random) process (a trajectory in our case) is only dependent on its


1 Define Behavior

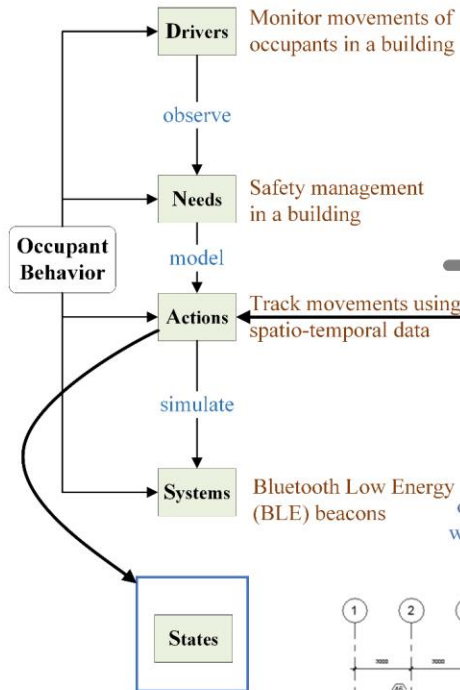

2 Monitor Occupant

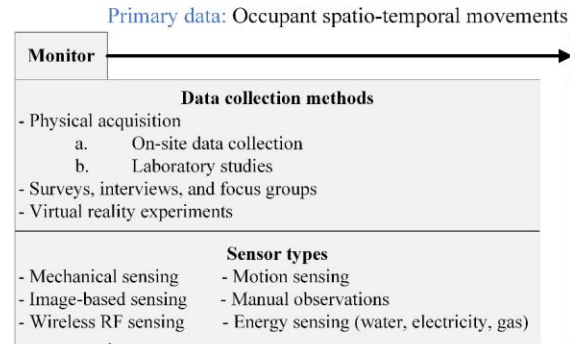

3 Store Movements

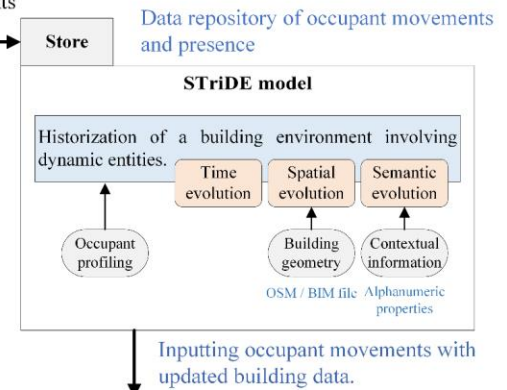

6 Classify behavior

- 1) Static (no movement),
- 2) Normal movement and
- 3) Unsafe movement

5 Enrich actions



4 Model behavior

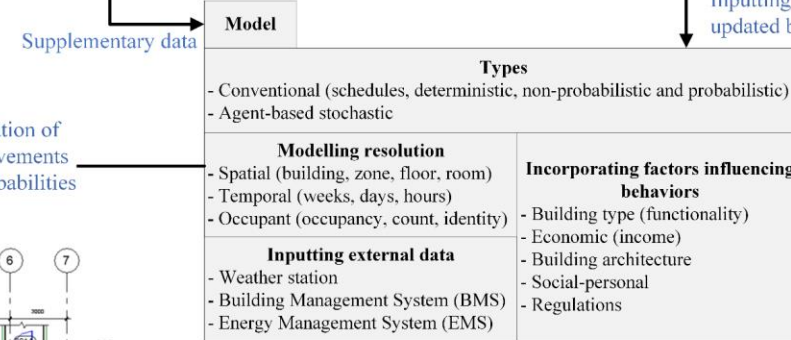


Figure 1 OBiDE framework for Worker Safety

60 current state or a current location which disregards the requirements of including the preceding
61 states and ultimately minimal training data is required (Arslan et al. 2019). For inputting the move-
62 ment states into HMMs, Gamma distribution for step lengths and Von Mises distribution (also
63 known as the circular normal distribution) for turning angles are used. After describing the states, a
64 Baum-Welch algorithm with Viterbi algorithm is used to extract most probable movement states
65 across each building location. For visualizing the states resulted from HMMs, BIM-based software
66 i.e. Revit Architecture is used. No movements but presence is shown in Green, normal movements
67 are in Yellow and risky movements in Red color in different building locations. The BIM approach
68 is selected because existing literature recognizes it as a ‘future IT solution’ and favored over tradi-
69 tional 3D CAD approaches as it is an efficient way of information management during the building
70 lifecycle (Arslan et al. 2019).

71 **Keywords:** Behaviors, Safety, Construction, BIM.

72 **References**

- 73 Arslan M, Cruz C, Ginhac D (2019) Semantic trajectory insights for worker safety in dynamic environments. *Automation*
74 *in Construction* 106:102854.
- 75 Arslan M, Cruz C, Ginhac D (2019, June) DNAS-STriDE Framework for Human Behavior Modeling in Dynamic Envi-
76 ronments. In: *International Conference on Computational Science*. Springer, Cham, p 787-793.
- 77 Cruz C (2017) Semantic trajectory modeling for dynamic built environments. In: *Data Science and Advanced Analytics*
78 (DSAA, IEEE, Tokyo, p 468-476.
- 79 Hong T, D'Oca S, Turner W J, Taylor-Lange S C (2015) An ontology to represent energy-related occupant behavior in
80 buildings. Part I: Introduction to the DNAs framework. *Building and Environment* 92:764-777.
- 81 Yan D, O'Brien W, Hong T, Feng X, Gunay H B, Tahmasebi F, Mahdavi A (2015) Occupant behavior modeling for
82 building performance simulation: Current state and future challenges. *Energy and Buildings*, 107: 264-278.
- 83 Zheng Y (2015) Trajectory data mining: an overview. *ACM Transactions on Intelligent Systems and Technology (TIST)*
84 6(3) 29: 1-41.